PYLE®

PPHP803MU PPHP103MU PPHP123MU PPHP153MU

2-Way PA Speaker System with Aux-in & USB/SD Card Readers

# USER'S MANUAL

www.pyleaudio.com

**Before using your new Speaker System Please review the following instructions, for the safety and investment.**

## INSTRUCTIONS

Before connecting the speaker, make sure the system is off and the controls on the minimum level. On the contrary the system could damage

1.Plug the power cable to the AC outlet and to the system and the speaker

2.Plug the microphone in the "MIC" input

3.Connect (CD, DECK, MP3, DVD, etc) on "LINE IN" input

4.Turn on the systems. A green LED will light up to indicate the speaker is on

5.Set the volume on the low level on the MIC and the LINE IN input

6.Increase the master volume (place on the right side of the LINE OUT *connector)

7.Set TREBLE and BASS controls to equalize the sound

8.A red LED will light up when the system detects overload power. You will must decrease the volume.

## CAUTIONS

Do not place the microphone against the speaker, it can cause feedback echo and it will damage the system

## SPECIFICATIONS:

| | PPHP803MU | PPHP103MU | PPHP123MU | PPHP153MU |
|---|---|---|---|---|
| Woofer | | | | |
| Impedance | 4ohms | 4ohms | 4ohms | 4ohms |
| Sensitivity | 93dB/m/w | 94dB/m/w | 95dB/m/w | 97dB/m/w |
| Freq.Resp | 40Hz-20KHz | 40Hz-20KHz | 30Hz-22KHz | 30Hz-22KHz |
| Diameter | 8" | 10" | 12" | 15" |
| Coil Diameter | 1.5" | 2" | 2.5" | 3" |
| Magnet | 30oz | 40oz | 50oz | 60oz |
| Tweeter | | | | |
| Impedance | 8ohms | 8ohms | 8ohms | 8ohms |
| Sensitivity | 100dB/m/w | 100dB/m/w | 100dB/m/w | 100dB/m/w |
| Freq.Resp | 800Hz-20KHz | 800Hz-20KHz | 800Hz-20KHz | 800Hz-20KHz |
| Coil Diameter | 1" | 1" | 1.34" | 1.75" |
| Magnet | 12oz | 12oz | 13.5oz | 23oz |
| Built-in Amplifier | Yes | Yes | Yes | Yes |

**Electrical safety**

All products are fitted with a detachable power cord (supplied) which connects to the AC mains and the back panel of the loudspeaker. The power cord has an IEC female connector on one end and male mains connectors on the other end. This cord is supplied specially to accommodate the different worldwide safety and electrical code requirements. The power cord supplied with your product has a 3-pin type plug. Do not cut off or damage the grounding plug. Like any electrical appliance, your EON powered speakers should not be used in water or when wet.

**Product design and specifications are subject to change without previous notice.**

## FEATURES

### PPHP803MU

*600Watts Powered Two-WAY PA Speaker*

-8" Woofer
-compression Driver with 1 " Titanium Diaphragm
-1/4 "Mic Inputs
- stereo RCA Line Input
- 1/4 " Line Outputs
-Master Volume,Mic Level
-Player MP3 USB Stick
-3.5mmAux-In Compatible With All Digital Music Players,Including Iphone,with Remote control
-Frequency Response:45Hz-20KHz
-Power Output:300Watts RMS, 600Watts Peak
-Crossover Frequency:3.0KHz
- Integrated 35mm Speaker stand Mount
-Dimensions:11.8"WX9.8"DX17.3"H

### PPHP103MU

*800Watts Powered Two-WAY PA Speaker*

-10" Woofer
-compression Driver with 1 " Titanium Diaphragm
-Full Featured 3 Channel Mixer
-XLR and 1/4"Mic Inputs
-XLR & stereo RCA Line Input
- 1/4" Line Outputs
-Master Volume,Treble,and Bass Controls, Mic Level and Line Level
-Player MP3 From SD Card / USB Stick
-3.5mmAux-In Compatible With All Digital Music Players,Including Iphone,with Remote control
-Frequency Response:45Hz-20KHz
-Power Output:400Watts RMS, 800Watts Peak
-Crossover Frequency:3.0KHz
-110/220 Voltage Selectable
- Integrated 35mm Speaker stand Mount
-Dimensions:14.1"WX11.4"DX21.2"H

### PPHP123MU

*1000Watts Powered Two-WAY PA Speaker*

-12" Woofer
-compression Driver with 1.34 " Titanium Diaphragm
-Full Featured 3 Channel Mixer
-XLR and 1/4"Mic Inputs
-XLR & stereo RCA Line Input
- XLR &1/4" Line Outputs
-Master Volume,Treble,and Bass Controls,MP3 Control, Mic Level and Line Leve
-Player MP3 From SD Card / USB Stick
-3.5mmAux-In Compatible With All Digital Music Players,Including Iphone,with Remote control
-Frequency Response:30Hz-22KHz
-Power Output:500Watts RMS, 1000Watts Peak
-Crossover Frequency:2.2KHz
-110/220 Voltage Selectable
- Integrated 35mm Speaker stand Mount
-Dimensions:16.5"WX13.7"DX25.1"H

### PPHP153MU

*1200Watts Powered Two-WAY PA Speaker*

-15" Woofer
-compression Driver with 1.75" Titanium Diaphragm
-Full Featured 3 Channel Mixer
-XLR and 1/4"Mic Inputs
-XLR & stereo RCA Line Input
- XLR &1/4" Line Outputs
- Master Volume,Treble,and Bass Controls,MP3 Control, Mic Level and Line Level
-Player MP3 From SD Card / USB Stick
-3.5mmAux-In Compatible With All Digital Music Players,Including Iphone, with Remote control
-Frequency Response:30Hz-22KHz
-Power Output:600Watts RMS, 1200Watts Peak
-Crossover Frequency:2.2KHz
-110/220 Voltage Selectable
- Integrated 35mm Speaker stand Mount
-Dimensions:19"WX15.7"DX29.1"H

PPHP803MU

Remote control

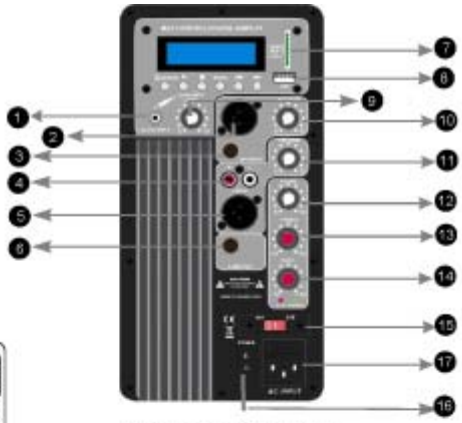

PPHP103MU

1.Iphone input
Allows you to connect an Iphone with a 3.5mm connector.

2.Banlanced Microphone Input
Connector for a balanced microphone input .

3.Microphone input
Allows you to connect a microphone with a 6.3mm connector.

4.RCA Line-In
Allows you to connect an externel audio device(CD, radio / DVD,etc) with RCA connectors

5 .XLR Line-In
Allows you to connect an external audio device (CD, radio / DVD,etc) with XLR connectors

6.Signal output
Use 6.35mm jack to connect amplifier or even another powered speaker cabinet in cascade using a XLR connector

7/8. SD card /USB

9.MP3/ Iphone Volume control
Set the MP3/ Iphone volume level

10.Mic volume control
Use this control to set the volume level of Microphone

11.Line-In signal volume control
Use this control to set the volume level of the Line-In signal

12.Volume control
Set the volume level

13.Treble
Use it to set the treble level

14.Bass
Use it to set the bass level

15 AC 110/220 Voltage Selectable

16.On/Off Power Switch
Press to power on/off the speak box

17.AC power
To connect the AC power cord

18 .Fuse

Remote control

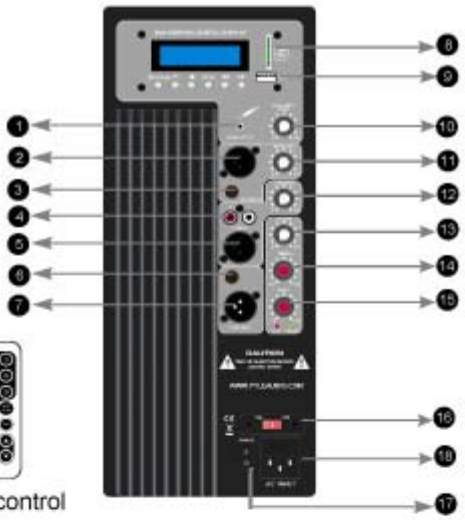

PPHP123MU

PPHP153MU

1.Iphone input
Allows you to connect an Iphone with a 3.5mm connector.

2.Banlanced Microphone Input
Connector for a balanced microphone input .

3.Microphone input
Allows you to connect a microphone with a 6.3mm connector.

4.RCA Line-In
Allows you to connect an externel audio device(CD, radio / DVD,etc) with RCA connectors

5 .XLR Line-In
Allows you to connect an external audio device (CD, radio / DVD,etc) with XLR connectors

6/7.Signal output
Use 6.35mm jack to connect amplifier or even another powered speaker cabinet in cascade using a XLR connector

8/9. SD card /USB

10.MP3/ Iphone Volume control
Set the MP3/ Iphone volume level

11.Mic volume control
Use this control to set the volume level of Microphone

12.Line-In signal volume control
Use this control to set the volume level of the Line-In signal

13.Volume control
Set the volume level

14.Treble
Use it to set the treble level

15.Bass
Use it to set the bass level

16 AC 110/220 Voltage Selectable

17.On/Off Power Switch
Press to power on/off the speak box

18.AC power
To connect the AC power cord